



## VersaTread Stair Treads



VersaTread fiberglass stair treads combine the unique features of fiberglass grating with an easy-to-fabricate panel. Waste is virtually eliminated by the double-bar cutting channel conveniently spaced every six inches, leaving a solid bar on each side of the cut. No nubs to cut off between treads = no wasted grating!

Standard panel size is 1-1/2" thick, 22-3/4" wide by 12' long with tread nosing on each side of the panel, allowing treads to be cut from both sides. Standard mesh is 1-1/2" by 6".

All VersaGrate fiberglass stair treads utilize a gritted nosing for added slip-resistance. This nosing contrasts with the color of the stair tread, increasing visibility and reducing slip/fall accidents.


VersaGrate fiberglass stair treads are available pre-fabricated and ready-to-install!

### FABRICATION GUIDE

For solid bars on all sides of the tread, use:


Standard Widths:  
Cutting channel spaced every 6" on center

Standard Depths:  
7-7/8"      9-3/8"      10-7/8"

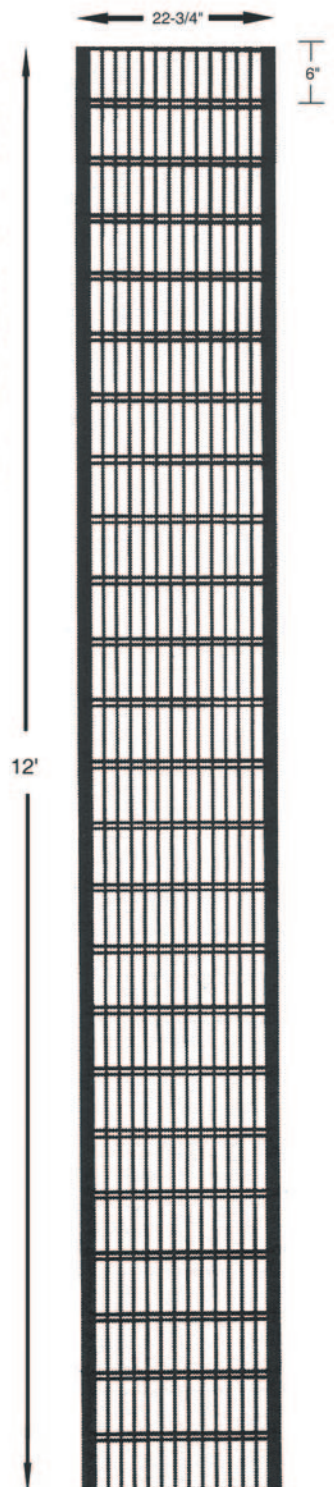


## Stair Tread Covers

VersaGrate fiberglass stair tread covers provide an excellent alternative to stair tread replacement, combining slip-resistance with corrosion resistance. Simply place the pre-molded cover over existing stairs and secure using VersaGrate's F-clip. It's quick, easy, and instantly transforms worn out or damaged stair treads.

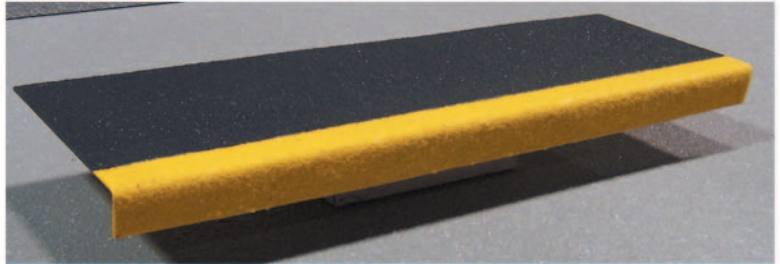

The aluminum oxide grit surface provides an extremely slip-resistant stair tread, even when wet or oily, for maximum safety. The integral yellow nosing allows for higher visibility, reducing trip hazards and improving OSHA compliance, all done with a minimum investment.

The standard panel size for stair tread covers is 13-1/2" deep by 12' long. Simply trim the panel to the desired depth and cut to the correct width. Plus, VersaGrate stair tread covers can be pre-fabricated to any depth and width, ready-to-install from the factory!

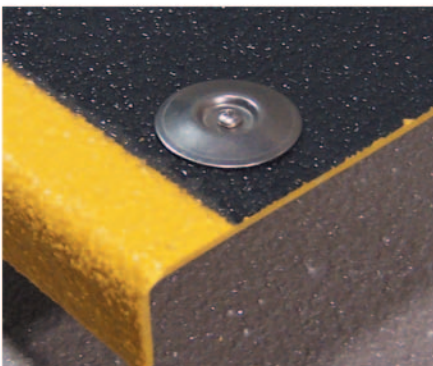

VersaGrate stair tread covers should be installed using mechanical fasteners to insure a positive connection to the tread underneath. Low profile head fasteners and washer-style clips ("F-clips") are available in 316SS for installation (see left).

Please call for more information on applications and installation.